

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 495 647 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
02.05.1997 Bulletin 1997/18

(51) Int. Cl.<sup>6</sup>: **B23K 26/08**

(21) Application number: 92300350.3

(22) Date of filing: 15.01.1992

**(54) Dynamic laser marking**

Dynamische Lasermarkierung

Marquage dynamique au laser

(84) Designated Contracting States:  
AT BE CH DE DK ES FR GB GR IT LI LU NL PT SE

• Ledger, Neville Richard  
Llansamlet, Swansea SA7 9AF (GB)

(30) Priority: 17.01.1991 GB 9101063  
08.05.1991 GB 9109935  
05.11.1991 GB 9123609

(74) Representative: Mayes, Stuart David et al  
BOULT, WADE & TENNANT  
27 Fumival Street  
London, EC4A 1PQ (GB)

(43) Date of publication of application:  
22.07.1992 Bulletin 1992/30

(56) References cited:  
EP-A- 0 168 351 EP-A- 0 176 872  
EP-A- 0 400 476 EP-A- 0 402 298  
WO-A-90/00459 US-A- 4 063 064  
US-A- 4 758 703

(73) Proprietor: UNITED DISTILLERS PLC  
Edinburgh EH12 6JW (GB)

(72) Inventors:  
• Clement, Robert Marc  
Rhos, Pontardawe, Swansea SA8 3HD (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

The present invention relates to a method and apparatus for marking a moving body of material using a high energy density beam.

Many products are manufactured or processed on production lines with the product concerned moving continuously from one work station to another until all the manufacturing or processing steps have been completed. Often the marking of the product is incorporated into the production line establishing a requirement for a device capable of marking the product without adversely affecting the continuous movement of the production line.

One such device in use today is the ink jet marker which is capable of directing a controlled jet of ink on to a moving package so as to produce a desired indicium. Such devices are capable of marking up to 1000 items a minute but require constant attention and frequent overhaul to prevent the nozzle of the ink jet from fouling. Such an overhaul may necessitate the shutting down of the production line with a consequent loss in manufacturing or processing time. Furthermore, devices of this type consume a large quantity of materials such as ink and solvent resulting in them having a significant running cost. Questions have also been raised as to the indelibility of the resulting mark.

Laser marking on the other hand, offers a clean and elegant alternative to ink jet marking and provides the body concerned with a truly indelible mark.

Broadly speaking, current commercial laser marking techniques fall within one of two categories. In the first of these categories a beam of unfocused laser radiation is passed through a mask so as to produce the desired pattern while in the second a beam of laser radiation is scanned across the object concerned tracing out the desired pattern.

US Patent No. 4,758,703 provides an example of a marking technique falling into the first category and it describes a method of covertly encoding a microscopically visible pattern onto the surface of a moving object. In the method described, the presence of a moving object is sensed and the speed of its approach measured so that at the appropriate moment, when the object passes the laser head, a beam of unfocused laser radiation is directed onto the object through a mask. It is the mask that is responsible for generating the pattern of the marking and comprises a mask plate having a cross-sectional area greater than that of the beam and incorporates a matrix of holes which may or may not be obscured. Having passed through the mask, the beam is focused to reduce the size of the pattern produced on the surface of the package as well as to increase the intensity of the beam. In the particular method described, the intensity of the beam is carefully controlled so that the final pattern is barely etched on to the surface and remains invisible to the naked eye.

The Applicant's own co-pending UK Patent Application No. 2247677 provides an example of a scanning

method of laser marking and relates to a method and apparatus for providing a body of material with a sub-surface mark in the form of an area of increased opacity to electromagnetic radiation. The method comprises the steps of directing at a surface of the body a high energy density beam to which the material is transparent and bringing the beam to a focus at a location spaced from the surface and within the body so as to cause the localised ionisation of the material. UK Patent Application No. 2247677 additionally relates to a body marked in accordance with the said method or by use of the said apparatus.

Although the scanning laser marking technique has the advantage of being more flexible in that the shape of the desired mark may be changed externally without interrupting the operation of the laser to change a mask element, the technique has yet to be widely used commercially for marking moving bodies because of fears that the resulting mark would be blurred or else "stretched" in the direction of motion of the body. This fear has often confined the scanning laser marking technique to applications in which the body to be marked is stationary leaving moving bodies to be marked using the masked beam technique although the clarity of the resulting mark using this technique is also ultimately limited by the speed of movement of the moving body.

Having said that one scanning system intended for use in the marking of moving objects is described in EP-A-0,400,476. In this system workpieces are guided along a conveyor belt at an almost constant speed. A laser beam is guided in accordance with the speed of movement of the workpieces which is detected by a transducer adjacent the conveyor belt.

According to a first aspect of the present invention, there is provided a method of marking a succession of bodies moving along a predetermined path comprising the steps of directing a high energy density beam at a body to be marked, concentrating the beam so as to produce an illuminated spot at a location on or within the moving body, moving said spot, and controlling the movement of the spot so that said movement is in accordance with the resultant of two components of movement, the first being equal to the velocity of the moving body and the second being relative to the moving body so as to create a mark of a predetermined shape, characterised in that the method further comprises the steps of detecting the presence of the body to be marked at a predetermined location along said path prior to the step of directing the high energy density beam at said body and controlling the movement of the spot in response to the detection of the body at said predetermined location so that the controlled movement is initiated in such a way that the spot impinges upon the body at a desired location.

In a preferred embodiment there is included the additional step of determining the velocity of the moving body. Whilst it is recognised that the velocity of the moving body may be determined by monitoring the speed of

movement of the means used to transport the body, the velocity of the moving body is preferably determined by means of direct measurement.

Advantageously, the high energy density beam is directed at the moving body by causing the path of the moving body to intersect the path of the actuated high energy density beam and actuating the high energy density beam at a predetermined time after the moving body passes a position a known distance from the point of intersection, that time being dependant upon the velocity of the moving body.

In a particular embodiment, wherein the mark comprises a sub-surface mark, the high energy density beam is preferably brought to a focus at a location within the moving body so as to cause localised ionisation of the material of which the body is formed and the creation of a mark in the form of an area of increased opacity to electromagnetic radiation. In such an embodiment, the moving body may be transparent to electromagnetic radiation at wavelengths within the visible region thereby rendering the mark visible to the naked eye. For example, the material may be of glass or plastics. Alternatively, the moving body may be opaque to electromagnetic radiation at wavelengths within the visible region so that the mark may only be "seen" by optical instruments operating at an appropriate wavelength within the electromagnetic spectrum. While such a mark is not capable of performing many of the functions of its visible counterpart it does represent a truly indelible covert mark.

In this or any other embodiment, the mark may comprise one or more numerals, letters or symbols or a combination thereof which in turn may represent an identification, a trade mark, a machine readable code or any other desired indicium. In addition, the mark may be three dimensional.

According to a second aspect of the present invention, there is provided an apparatus for marking a succession of bodies moving along a predetermined path comprising means for creating a high energy density beam and directing the beam at a body to be marked, means for concentrating the beam so as to produce an illuminated spot at a location on or within the moving body, means for moving said spot, and means for controlling said moving means to provide controlled movement of the spot in accordance with the resultant of two components of movement, the first being equal to the velocity of the moving body and the second being relative to the moving body so as to create a mark of a predetermined shape, characterised in that the apparatus further comprises means for detecting the presence of the body to be marked at a predetermined location along said path, said means for controlling being responsive to said means for detecting to initiate said controlled movement so that the spot impinges upon the body at a desired location.

Advantageously, the means for moving the spot includes means for moving the spot in accordance with said second of the two components of movement, said

means comprising at least one moveable mirror disposed in the path of the beam. The movement of the mirror may be controlled in accordance with a computer program enabling the final shape of the mark to be easily manipulated while the moveable mirror itself may comprise a galvanometer mirror. Whilst it is recognised that any suitable means may be provided to move the mirror such as a servo motor or manual joy stick, the properties of a galvanometer mirror provide a speed of response and an ease of control that represent a significant advantage over alternative control means.

In a preferred embodiment, the means for moving the spot in accordance with said second of the two components of movement is also capable of moving the spot in accordance with said first of the two components.

In another embodiment the means for moving the spot includes additional means for moving the spot in accordance with the said first of the two components of movement, the means preferably including at least one rotatably mounted mirror whose speed of rotation is varied in accordance with the velocity of the moving body.

In a further embodiment the rotatably mounted mirror of the preceding embodiment is multi-faceted.

In yet a further embodiment the means for moving the spot in accordance with said first of the two components of movement includes at least one mirror moveable at the same velocity as the moving body.

In yet a further embodiment the means for moving the spot in accordance with the said first of the two components of movement includes at least one acousto-optic or electro-optic crystal.

In a preferred embodiment there is further provided means for determining the velocity of the moving body. Whilst it is recognised that the velocity of the moving body may be determined by monitoring the speed of movement of the means used to transport the body, the velocity of the moving body is preferably determined by means of direct measurement. For example, in a particular arrangement, the velocity of the moving body may be determined by measuring the time taken for the moving body to travel between two opto-detectors spaced a known distance apart.

Advantageously, the high energy density beam is directed at the moving body by causing the path of the moving body to intersect the path of the high energy beam when actuated and providing means to actuate the high energy density beam at a predetermined time after the moving body passes a position a known distance from the point of intersection, that time being dependant upon the velocity of the moving body.

The means for concentrating the beam may include a lens element having a focal length that varies across its width so as to compensate for a particular de-focusing effect. Alternatively, or in addition, the means for concentrating the beam may include a zoom lens to either again compensate for a particular de-focusing effect or to enable marks to be made at different depths within the body and so allow for the creation of three dimensional marks. In a particular arrangement, the

means for concentrating the beam may include a diverging lens.

In a particular embodiment, wherein the mark comprises a surface mark, the means for creating a high energy density beam preferably comprises a CO<sub>2</sub> laser.

In an embodiment wherein the mark comprises a sub-surface mark, the means for creating a high energy density beam preferably comprises a laser which is focused so as to have a peak energy density at the focus of at least 10 J/cm<sup>2</sup>. This peak energy density is preferably achieved by means of a laser which is focused to have a power density at the focus of at least 10<sup>7</sup> W/cm<sup>2</sup> and is pulsed with a pulse duration of at least 10<sup>-6</sup> seconds. If in such circumstances, the body of material to be marked is transparent to electromagnetic radiation at wavelengths within the visible region, then the means for creating the required high energy density beam is preferably a Nd-YAG (Neodymium-doped Yttrium Aluminium Garnet) laser operating at a wavelength of 1.06 µm.

Advantageously, a secondary source of visible laser radiation may be provided to facilitate alignment of the high energy density beam.

A conveyor belt is preferably provided to transport the moving body and in such circumstances the conveyor belt may be provided with means to control the lateral position of the moving body relative thereto.

A number of embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic plan view of a laser marking station in accordance with the second aspect of the present invention in which a marking apparatus and sensing module are shown disposed adjacent a continuously moving conveyor belt;

Figure 2 is a schematic diagram of the sensing module of Figure 1;

Figure 3 is a schematic diagram of the marking apparatus of Figure 1;

Figure 4 is a schematic diagram of the way in which electrical power is distributed throughout the marking apparatus of Figure 1;

Figure 5 is a flow diagram of the combined operational sequence of the marking apparatus and sensing module of Figure 1;

Figure 6 is schematic diagram of a marking apparatus in accordance with a second embodiment;

Figure 7 is a schematic diagram of a marking apparatus in accordance with a third embodiment; and

Figure 8 is a schematic diagram of a marking apparatus in accordance with a fourth embodiment.

The laser marking station shown in Figure 1 comprises a marking apparatus 10 and a sensing module 12 both of which are contained within a protective housing 14 that straddles a continuously moving conveyor belt 16.

The conveyor belt 16 is generally of sufficient width to transport to the laser marking station a body of material to be marked and is further defined by a moving web 18 and two vertically projecting side rails 20 and 22. Typically the first of the two side rails 20 is fixed relative to the moving web 18 while the other side rail 22 is moveable relative thereto by means of an adjusting screw 24. Upon tightening the adjusting screw 24 the distance between the two side rails 20 and 22 is decreased thereby narrowing the effective width of the conveyor belt 16.

The body of material to be marked, which in the accompanying drawings is depicted as a glass bottle 26, is transported to the laser marking station by the conveyor belt 16 and enters the protective housing 14 by a first opening 28. Thereafter the body 26 is transported past the sensing module 12 and the marking apparatus 10 before passing out of the protective housing 14 through a second opening 30. For the purposes of safety this distance between the marking apparatus 10 and either of the first or second openings 28 or 30 is such as to ensure that an operator can not accidentally reach inside the protective housing 14 and place his or her hand in front of the marking apparatus 10.

The sensing module 12 is shown in greater detail in Figure 2 and comprises a pair of opto-detectors 32 and 34 disposed side by side adjacent the conveyor belt 16. Each of the opto-detectors 32 and 34 includes a light source 36 and a suitable detector 38 and is aligned with one of a pair of respective retro-reflectors 40 or 42 disposed on the opposite side of the conveyor belt 16. Light is emitted from the light source 36 toward the associated retro-reflector whereupon it is reflected back toward the opto-detector and detected by the detector 38. Thus when there is nothing placed between an opto-detector and its corresponding retro-reflector, as shown in relation to opto-detector 34 in Figure 2, the quantity of light detected by the detector 38 is a maximum. However, when the optical path between an opto-detector and its corresponding retro-reflector is obstructed by, for example the passage of the body to be marked along the conveyor belt 16 as shown in Figure 2 in relation to opto-detector 32, then the quantity of light reflected by the corresponding retro-reflector, in this case retro-reflector 40, and detected by the detector 38 falls below a pre-set threshold value and an appropriate signal is generated.

In order to enhance the sensitivity of each of the opto-detectors 32 and 34, the light source 36 is selected so as to emit light in the visible or near infra-red region of the electromagnetic spectrum whilst the detector 38 is chosen not only to be selectively sensitive to this particular frequency range but also to be responsive only to light having the polarisation characteristics of the

source 36. In this way the detector 38 is insensitive to light emanating from sources other than the light source 36 or to light reflected from surfaces other than the associated retro-reflector such as, for example, from the surface of the body to be marked since such reflections would typically possess different polarisation characteristics.

The marking apparatus 10 is shown in greater detail in Figure 3 and comprises of source 44 of laser radiation 46 which is directed so as to interest the path of the moving body 26.

In a first embodiment the marking apparatus 10 is designed so as to facilitate the surface marking of the moving body 26. To this end laser radiation of a sufficient energy density is directed toward the body 26 causing areas of the surface impinged thereby to melt and reflow leaving a resulting mark. In the particular embodiment illustrated in Figure 3 the source 44 comprises an RF excited simulated continuous-wave carbon dioxide (CO<sub>2</sub>) laser that emits a beam of laser radiation 46 having a wavelength of 10.6µm and which is consequently invisible to the naked eye. Having been emitted from the CO<sub>2</sub> laser 44, the beam of laser radiation 46 is incident upon a first reflecting surface 48 that directs the beam 46 through a beam expander 50 and a beam combiner 52 to a second reflecting surface 54. A second source of laser radiation, in the form of a low power He-Ne (Helium-Neon) laser 56, is disposed adjacent to the CO<sub>2</sub> laser 44 and emits a secondary beam of visible laser radiation 58 with a wavelength of 638nm. The secondary beam 58 impinges upon the beam combiner 52 where it is reflected toward the second reflecting surface 54 coincident with the beam of laser radiation 46 from the CO<sub>2</sub> laser 44. Thus the necessary properties of the beam combiner 52 are that it should transmit electromagnetic radiation with a wavelength of 10.6µm whilst reflecting electromagnetic radiation with a wavelength of 638nm. In this way the He-Ne laser beam 58 provides the combined CO<sub>2</sub>/He-Ne beam 46, 58 with a visible component that facilitates optical alignment.

Once combined, the two coincident beams 46, 58 are reflected at the second reflecting surface 54 toward a third reflecting surface 60 and from the third reflecting surface 60 are further reflected toward a fourth reflecting surface 62. From the fourth reflecting surface 62 the combined beam 46, 58 is reflected yet again toward a head unit 64 from whence the combined beam 46, 58 is finally directed so as to intersect the path of the moving body 26. In order to facilitate marking at different heights from the base of the body 26, the third and fourth reflecting surfaces 60 and 62 are integrally mounted, together with the head unit 64, so as to be adjustable in a vertical plane under the action of a stepping motor 66 (not shown).

Within the head unit 64 the combined CO<sub>2</sub>/He-Ne beam 46, 58 is sequentially incident upon two moveable mirrors 68 and 70. The first of the two mirrors 68 is disposed so as to be inclined to combined beam 46, 58 that is incident upon it as a result of reflection from the

fourth reflecting surface 62 and is moveable in such a way to cause the beam reflected therefrom to move in a vertical plane. The second of the two mirrors 70 is similarly inclined, this time to the beam 46, 58 that is incident upon it as a result of reflection from the first mirror 68 and is moveable in such a way as to cause a reflected beam 46, 58 to move in a horizontal plane. Consequently it will be apparent to those skilled in the art that the beam 46, 58 emerging from the head unit 64 maybe moved in any desired direction by the simultaneous movement of the first and second mirrors 68 and 70. In order to facilitate this movement the two moveable mirrors 68 and 70 are mounted on respective first and second galvanometers 72 and 74. Whilst it is recognised that any suitable means maybe provided to control the movement of the two mirrors 68 and 70, such as by the use of individual servo motors or a manual joystick, the approach adopted combines a speed of response with an ease of control that represents a significant advantage over alternative control means.

Emerging from the head unit 64, the combined beam 46, 58 is focused by passing through a lens assembly 76 which may include one or more lens elements. A first lens element 78 is capable of bringing the beam 46, 58 to a focus at a chosen location on the surface of the body to be marked. As is well known, the maximum power density of the beam 46, 58 is inversely proportional to the square of the radius of the beam 46, 58 at its focus which in turn is inversely proportional to the radius of the beam 46, 58 that is incident upon the focusing lens 78. Thus for a beam 46, 58 of electromagnetic radiation of wavelength λ and radius R that is incident upon a lens of focal length f, the power density at the focus E, is to a first approximation, given by the expression:

$$E = \frac{PR^2}{\lambda^2 f^2} \text{ W/m}^2$$

Where F is the power produced by the laser. From this expression the value and purpose of the beam expander 50 is readily apparent since increasing the radius of the beam R serves to increase the power density E at the focus. In addition, the lens element 78 is typically a short focal length lens having a focal length in the range between 70mm and 80mm so that typical power densities at the focus of the beam 46, 58 are in excess of 300 W/cm<sup>2</sup>. At power densities of this order thermal interactions occur at the surface of the body to be marked 26 in which the incident radiation 46, 58 is absorbed as heat. This localised heating causes the surface of the body 26 to melt and reflow leaving a residual mark inscribed upon the surface. By moving the focus of the beam 46, 58 using the mirrors 68 and 70 the mark maybe made to a predetermined shape and in particular, maybe made to comprise one or more numerals, letters or symbols or a combination thereof which in turn may represent an identification, a trade

mark, a machine readable code or any other desired indicium.

The power density required to stimulate thermal interactions at the surface of the body will, of course, depend upon the material of the body and the speed at which the beam 46,58 is scanned. Materials such as perspex may be marked using a beam 46,58 having a power density of as little as approximately 50W/cm<sup>2</sup> while to mark some metals it is necessary for the beam 46,58 to have a power density of approximately 1MW/cm<sup>2</sup>. Bodies made of glass fall between these two extremes and may be marked using a beam 46,58 having a power density of in excess of 300W/cm<sup>2</sup> and a scanning speed of 3m/sec.

In the interests of safety, the two lasers 44 and 56 and their respective beams 46 and 58 are enclosed within a safety chamber 80 as shown in Figure 4 with the combined beam 46, 58 emerging from the safety chamber 80 only after passing through the lens assembly 76. Access to the two lasers 44 and 56 and the various optical elements disposed in the path of the respective beams 46, 58 is gained by means of a door panel 82 which is fitted with an interlock 84 that prevents the operation of the CO<sub>2</sub> laser 44 while the door panel 82 is open. It is to be noted that the He-Ne laser 56 need not necessarily be fitted with an interlock in the same way since it only operates at a very low power and does not represent a significant danger to a skilled operator.

A single phase electrical mains supply of 240V is fed via the door panel interlock 84 to a mains distribution unit 86 that is disposed below, and isolated from, the safety chamber 80 in order to prevent any electrical effects interfering with the operation of the lasers 44 and 56. From the distribution unit 86 mains electrical power is provided to the CO<sub>2</sub> laser 44 and He-Ne laser 56 as well as to a chiller unit 88 that serves to cool the CO<sub>2</sub> laser 44. In addition, mains electrical power is also supplied to the stepping motor 66 and to a computer 90. Three AC/DC convertors and associated voltage regulators provide regulated DC voltage supplies of 9v, 12v and 15v that are fed respectively to the He-Ne laser 56 to facilitate the pumping mechanism, to a further interlock 92 that prevents premature firing of the CO<sub>2</sub> laser 44, and to the head unit 64 and in particular to the first and second galvanometers 72 and 74 to produce a pre-determined movement of the first and second mirrors 68 and 70.

The combined operational sequence of the marking apparatus 10 and the sensing module 12 is shown schematically in Figure 5 and commences with the computer 90 either calculating or performing a look-up to identify the next mark to be applied. Thus if the laser marking station is used to mark a number of bodies each with a sequential reference number the computer 90 may calculate the next mark by adding the necessary increment to the reference number that constituted the previous mark. Alternatively, at the start of a batch or during more complicated marking sequences, the computer 90 may identify the next mark from one of a

pre-programmed list of marks contained in a suitable memory device. However the next mark is identified, it may be displayed on an operator's console along with other information such as the number of bodies marked in a particular batch, the average line speed of the bodies transported past the sensing module 12 and any other desired information.

Having identified the mark to be applied to the moving body 26, the computer 90 calculates the vectors necessary to trace out the mark assuming the body 26 to be stationary at the time of marking. These vectors are transformed into an electrical signal that if used to modulate the 15v DC supply applied to the first and second galvanometers 72 and 74 would produce a series of movements of the first and second mirrors 68 and 70 capable of moving the focus of an actuated laser beam in such a way as to trace out the desired mark.

As the body to be marked is transported to the laser marking station by means of the conveyor belt 16 the position of the moving body 26 relative to the fixed side rail 20 may be altered by means of adjusting screw 24. Typically adjusting screw 24 is used to narrow the effective width of the conveyor belt 16 adjacent the first opening 28 in the protective housing 14. In this way the effective width of the conveyor belt 16 is made not much wider than the moving body 26 itself thereby providing a degree of control over the lateral distance between the body to be marked and the various components of the sensing module 12 and the marking apparatus 10.

All this time the sensing module 12 is used to detect the approach of the body to be marked. As the body 26 reaches opto-detector 32 its leading-edge obstructs the optical path between the light source 36, the retro-reflector 40 and the detector 38 causing the quantity of light detected to fall below a preset threshold value. As a result an appropriate signal is generated and sent to the computer 90 whereupon a clock is actuated. This clock is not stopped until a time  $t_1$  later when the leading-edge of the moving body 26 is detected in the same way at the second opto-detector 34. Since the two opto-detectors 32 and 34 are a known distance  $d_1$  apart, the velocity  $v$  of the body to be marked may be readily calculated by dividing the known distance  $d_1$  by the time  $t_1$  measured by the clock. Thus:

$$v = \frac{d_1}{t_1}$$

In order to provide a compact apparatus capable of marking bodies moving at relatively high line speeds, the distance  $d_1$  between the two opto-detectors 32 and 34 is preferably made as small as possible. In the limiting case opto-detector 34 is caused to abut opto-detector enabling  $d_1$  to be reduced to a value of 1mm. Even at such small distances the oscillator that forms the basis of the clock is capable of in excess of 5 clock cycles during a typical time interval  $t_1$  so that the reduction in  $d_1$  does not have a discernable effect on the



accuracy to which the velocity  $v$  maybe measured.

Having passed the second opto-detector 34, the body to be marked continues to be transported by the conveyor belt 16 until at a time  $t_2$  later it is adjacent the marking apparatus 10. Since the second opto-detector 34 and the marking apparatus 10 are again a known distance  $d_2$  apart, the time  $t_2$  maybe calculated by dividing the distance  $d_2$  by the velocity  $v$  of the moving body 26. Thus:

$$t_2 = \frac{d_2}{v}$$

Or:

$$t_2 = \frac{d_2}{d_1} \times t_1$$

Again, in order of provide a compact apparatus, the distance  $d_2$  maybe decreased to a minimum ultimately limited by the computing power of the computer 90 but which is typically of the order of 5mm.

Using the above equation, the computer 90 calculates the estimated time of arrival  $t_2$  of the body to be marked adjacent the marking apparatus 10. This time interval however represents the time at which the leading-edge of the body 26 is adjacent the marking apparatus 10 and so, unless the desired mark is to be applied at the leading-edge, a further delay  $\delta t$  is added to the time interval  $t_2$  to yield a time  $t_3$  at which that portion of the body 26 to be marked is adjacent the marking apparatus 10.

At a time  $t_3$  after the signal generated by the second opto-detector 34 the  $\text{CO}_2$  laser 44 is actuated and the combined  $\text{CO}_2/\text{He-Ne}$  beam 46, 58 focused at the estimated position of the surface of the body 26. At the same time an electrical signal is generated to modulate the 15v DC supply applied to the first and second galvanometers 72 and 74 that not only reproduces the vectors necessary to trace out the desired mark but also includes a superimposed component that compensates for the movement of the body 26 at the velocity  $v$ . The modulated 15v DC supply produces a series of movements of the first and second mirrors 68 and 70 that direct the focus of the combined  $\text{CO}_2/\text{He-Ne}$  beam 46, 58 so as to trace out the desired mark whilst at the same time moving the mark as it is being traced with a velocity  $v$  thereby enabling real time dynamic scanning to take place.

After the body 26 has been marked it continues to be transported by the conveyor belt 16 and passes out the protective housing 14 and away from the laser marking station by way of the second opening 30. The marked body 26 may thereafter be transported to further processing stations if required whilst the computer 90 calculates the next mark to be applied and the operational sequence begins all over again.

It will be apparent to those skilled in the art that as the body 26 moves past the marking apparatus 10, the distance between the lens assembly 76 and that portion of the surface of the body 26 that is to be marked is subject to constant change. Even if the body 26 were to be stationary when marked, if the desired mark were of a sufficient size any curvature of the body 26 would also give rise to differing distances between the lens assembly 76 and various points on the surface. On top of this, successive bodies to be marked may be placed on the conveyor belt 16 at different distances from the fixed side rail 20 despite a narrowing of the effective width of the conveyor belt 16 prior to the laser marking station. If, as has been described, the first lens element 78 is of a fixed focal length, each of the above factors will contribute to parts of the mark applied to the body being more or less out of focus. However, with the careful selection of the focal length of the lens element 78 this problem maybe reduced to a minimum.

As has been previously stated, the focal length of the first lens element 78 is typically between 70mm and 80mm and is capable of focusing the combined  $\text{CO}_2/\text{He-Ne}$  beam 46, 58 so as to yield at the focus a power density that is typically in excess of  $300 \text{ W/cm}^2$ . Having said that however, for a lens element having a focal length within this range, the power density at a small distance  $\delta x$  from the focus is still sufficient to cause thermal interactions to occur within the body to be marked. In a preferred embodiment the lens element 78 has a focal length of 75mm enabling  $\delta x$  for glass to be as large as 5mm, although the size of  $\delta x$  is, of course, dependant upon the material of which the body 26 is comprised. Using such a lens however, the apparatus described may efficiently mark moving bodies whose surfaces lie within a small range of distances either side of an optimum distance from the lens assembly 76.

Alternatively, or in addition, a second lens element 92 may be placed in series with the first lens element 78 in order to compensate for one or more of the de-focusing effects described above. Such a lens element 92 may possess a focal length that varies across its width and may, for example, comprise a flat field lens so as to compensate for any curvature of the surface of the body to be marked.

In another arrangement, the lens assembly 76 may include a third lens element 94 in the form of a zoom lens whose focal length may be altered as the body to be marked passes the marking apparatus 10 thereby maintaining the focus of the combined  $\text{CO}_2/\text{He-Ne}$  Beam 46, 58 at the desired point on the surface of the body 26 in spite of the de-focusing effects described above.

In yet a further arrangement, in place of the second lens element 92 and or the third lens element 94 there may be disposed a fourth lens element 95 (not shown) taking the form of a diverging lens. The fourth lens element 95 of focal length  $f_2$  is preferably disposed a distance  $f_2$  in front of the focus that would otherwise be

produced by the first lens element 78. In this way the fourth lens element 95 produces a narrow parallel beam of high energy density radiation which may be directed at the moving body 26 to produce an illuminated spot on the surface thereof. Provided that the narrow beam has a sufficient power density it may be used to facilitate the surface marking of the moving body 26 whilst at the same time not being prone to any of the de-focusing effects described above.

In a second embodiment shown in Figure 6, the marking apparatus 10 is again designed to facilitate the surface marking of a moving body of material 26 except that rather than superimposing a component that compensates for that movement on the already complex movement of the first and second mirrors 68 and 70, the movement of the body 26 is entirely compensated for by a fifth reflecting surface 96.

The fifth reflecting surface 96 is rotatably mounted about an axis 98 and is positioned so as to direct on to the moving body 26 the combined CO<sub>2</sub>/He-Ne beam 46, 58 that is incident upon it as a result of a reflection from the second mirror 70. As the body to be marked passes the marking apparatus 10, the fifth reflecting surface 96 rotates about the axis 98 in such a way as to keep the combined CO<sub>2</sub>/He-Ne beam 46, 58 directed upon the moving body 26.

The fifth reflecting surface 96 preferably comprises the mirror of a third galvanometer 100 (not shown). In this way the movement of the fifth reflecting surface 96 may be facilitated with the same speed of response and ease of control as enjoyed by the first and second mirrors 68 and 70. Under such circumstances, when the CO<sub>2</sub> laser 44 is actuated and the 15v DC supply applied to the first and second galvanometers 72 and 74 is modulated to produce the pre-determined movement of the first and second mirrors 68 and 70, a separate 15v DC supply may be applied to the third galvanometer 100 and modulated in accordance with the previously measured velocity characteristic of the moving body 26. As before, the combined effect of the movement of the mirrors of the three galvanometers 72, 74 and 100 is to enable the real time dynamic scanning of the moving body 26 by the combined CO<sub>2</sub>/He-Ne beam 46, 58.

In Figure 6 the fifth reflecting surface 96 is shown disposed between the second mirror 70 and the lens assembly 76 although it will be apparent to those skilled in the art that the fifth reflecting surface 96 may equally well be disposed at other points along the optical path of the combined CO<sub>2</sub>/He-Ne beam 46, 58, such as, for example, immediately after the lens assembly 76.

In a third embodiment which is similar to the second in that the compensation for the movement of the body 26 is made separately from the generation of the mark itself, the fifth reflecting surface 96 is replaced by a multi-faceted mirror 102 as shown in Figure 7. As with the fifth reflecting surface 96, the multi-faceted mirror 102 is rotatably mounted about an axis 104 and positioned so as to direct on to the moving body 26 the combined CO<sub>2</sub>/He-Ne beam 46, 58 that is incident upon it as

a result of a reflection from the second mirror 70. As the body to be marked passes the marking apparatus 10, the multi-faceted mirror 102 rotates about the axis 104 in such a way as to keep the combined CO<sub>2</sub>/He-Ne beam 46, 58 directed upon the moving body 26.

The advantage of this third embodiment as distinct from the second embodiment described above is that once the moving body 26 has been marked, the multi-faceted mirror 102, unlike the fifth reflecting surface 96 of the second embodiment, does not need to rotate rapidly about the axis 104 in either sense in order to be appropriately aligned for the next body to be marked. Instead, the multi-faceted mirror 102 may continue to rotate in the same sense and at such a speed as to enable the combined CO<sub>2</sub>/He-Ne beam 46, 58 to be directed onto the next body to be marked by virtue of a reflection from a different surface of the multi-faceted mirror 102. The shape of the multi-faceted mirror 102 does however impose conditions on its own rotational speed which must be such as to ensure that it does not rotate through an angle greater than that subtended by the operative face during the time taken to mark the moving body 26.

The rotation of the multi-faceted mirror 102 may be controlled by the computer 90 once the velocity of the moving body 26 has been measured and the number of vectors required to trace out the desired mark is known since the latter enables a prediction of the necessary marking time while the former permits a calculation of the distance the body 26 will be transported while being marked.

In Figure 7 the multi-faceted mirror 102 is shown disposed between the second mirror 70 and the lens assembly 76 although it will be apparent to those skilled in the art that the multi-faceted mirror 102 may equally well be disposed at other points along the optical path of the combined CO<sub>2</sub>/He-Ne beam 46, 58 such as, for example, immediately after the lens assembly 76.

In a fourth embodiment of the marking apparatus 10 shown in Figure 8, the movement of the body 26 is compensated for by a lateral movement of the entire head unit 64 and lens assembly 76. Having measured the velocity of the body to be marked, the head unit 64 and lens assembly 76 is moved in a direction parallel to the moving body 26 under the action of a motor 106 (not shown). By moving the head unit 64 and lens assembly 76 at the same velocity as the moving body 26 the relative velocity between the two may be reduced to zero whilst the desired mark is applied. Once the moving body 26 has been marked, the head unit 64 and lens assembly 76 are rapidly returned to their starting positions, again under the action of motor 106 (not shown), so as to be ready for the next body to be marked.

By ensuring that the combined CO<sub>2</sub>/He-Ne beam 46, 58 that is reflected from the first mirror 68 travels in a direction parallel to the conveyor belt 16 before being reflected toward the moving body 26 at the second mirror 70, it will be apparent to those skilled in the art that only the second mirror 70 and the lens assembly 76



need be moved by the motor 106 (not shown) in order to achieve the desired effect. Indeed, if the lens assembly 76 were disposed in the optical path of the combined CO<sub>2</sub>/He-Ne beam 46, 58 between the fourth reflecting surface 60 and the first mirror 68 then only the second mirror 70 would need to be moved by the motor 106.

In a fifth embodiment one or more acousto-optic or electro-optic crystals 108 (not shown) may be disposed in the path of the beam 46, 58 to compensate for the movement of the body 26. Crystals of these types possess the property of being able to deflect an incident beam through different angles depending on the value of a voltage applied thereto. Therefore by applying a suitably varying voltage to the crystals 108 (not shown) the combined CO<sub>2</sub>/He-Ne beam 46, 58 may continue to be directed at the moving body 26 as it passes the marking apparatus 10.

It will also be apparent to those skilled in the art that in the light of the Applicant's co-pending UK Patent Application No. 2247677 the apparatus described in relation to any of the foregoing embodiments may also be employed to facilitate the sub-surface marking of a moving body of material without substantial alteration.

In the past, in order to produce an indelible mark manufacturers have relied almost exclusively on surface marking. However one of the fundamental problems with this type of marking is that it may either be destroyed by removing a part of the surface upon which the mark is applied or imitated by the application of an identical mark on substitute body. By use of apparatus similar to that already described a moving body of material may be provided with a sub-surface mark by directing at the surface of the body a focused beam of high energy density laser radiation to which the material is transparent. The beam is focused at a location spaced from the surface and within the body so as to cause localised ionisation of the material and the creation of a mark in the form of an area of increased opacity to electromagnetic radiation substantially without any detectable change at the surface.

For the avoidance of doubt, the term transparent as used above with reference to the material to be marked refers to a material in which the high energy density beam can penetrate at least to the depth of the desired mark and as such includes translucent materials and materials such as coloured or smoked glass in which the transmission characteristic to electromagnetic radiation at wavelengths in the visible region has been reduced but not eliminated. The term transparent also includes materials which are opaque to electromagnetic radiation at wavelengths in the visible region but which are at least capable of transmitting electromagnetic radiation at wavelengths within the same region of the electromagnetic spectrum as that of the high energy density beam.

The possible types of interaction between laser radiation and a body of material may be categorised under three headings dependant upon the power density of the laser radiation concerned. In order of increas-

ing power density these headings are as follows:

1. Photo-chemical interactions including photo-induction and photo-activation;
2. Thermal interactions in which the incident radiation is absorbed as heat; and
3. Ionising interactions which involve the non-thermal photo-decomposition of the irradiated material.

The difference between the thresholds of these three interactions is clearly demonstrated by comparing the typical power density of 10<sup>-3</sup> W/cm<sup>2</sup> required to produce a photo-chemical interaction with the power density of 10<sup>12</sup> W/cm<sup>2</sup> typical of ionisation interactions such as photo-ablation and photo-disruption.

For localised ionisation of the material to take place, the high energy density beam must possess sufficient energy to cleave molecular bonds and create a plasma at the point of focus. Once the beam has been removed, the plasma cools to form a localised zone of damage or disruption which scatters any electromagnetic radiation that is incident upon it with the result that the zone appears as an area of increased opacity.

At present, the only commercially available lasers capable of inducing ionisation interactions are pulsed lasers having a peak energy that, when focused, is sufficient to create a plasma within the material concerned. In order to facilitate the sub-surface marking of a moving body therefore the source 48 of laser radiation 50 is preferably replaced by a laser having a power density at its focus of at least 10<sup>7</sup> W/cm<sup>2</sup> and a pulse duration of no more than 10<sup>-6</sup> seconds. In this way the energy density of each pulse is at least 10 J/cm<sup>2</sup> and sufficient to induce localised ionisation of the material at the focus of the beam.

If the sub-surface mark is to be visible to the naked eye the body to be marked must be transparent to electromagnetic radiation at wavelengths within the visible region. For example, the body may be of glass or plastics. The body to be marked however need not necessarily be limited in this way and may comprise a material that is opaque to electromagnetic radiation at wavelengths within the visible region. Under these circumstances the resulting sub-surface mark is hidden to the naked eye but maybe "seen" by optical instruments operating at an appropriate wavelength within the electromagnetic spectrum such as that of the high energy density beam. While such a mark is not capable of performing many of the functions of its visible counterpart, it does represent a truly indelible covert mark.

Assuming that the eventual sub-surface mark is intended to be visible to the naked eye and that therefore the moving body 26 is of a material such as glass or plastics that are transparent to electromagnetic radiation within the visible region of the electromagnetic spectrum, the source 48, in addition to the power constraints identified above, must also be selected so that the material of the body 26 is transparent to the laser radiation 50 that it produces. Under these circum-

stances the source 48 preferably comprises a Nd-YAG (Neodymium-doped Yttrium Aluminium Garnet) laser operating at a wavelength of 1.06µm.

The remainder of the apparatus described need not be substantially altered in order to facilitate sub-surface marking although the selection of the source 40 will of course have an effect on the choice of the optical elements used to direct and focus the resulting laser radiating 50 since not all such elements will operate with the same efficiency at different wavelengths within the electromagnetic spectrum. It is however considered that the appropriate selection of elements falls within the ordinary expertise of one skilled in the art.

When employed to facilitate the sub-surface marking of a moving body, the lens assembly 76 may include a third lens element 94 in the form of a zoom lens so that marks maybe made at different depths within the moving body 26 and so allow for the creation of three dimensional marks.

It will be apparent to those skilled in the art that while the apparatus described includes means for determining the velocity of the moving body 26 this need not necessarily be so since a mechanical linkage may be incorporated in to the apparatus that imparts to the combined CO<sub>2</sub>/He-Ne beam 46,58 a component of movement equal to the velocity of the moving body 26 without ever determining what that velocity is.

#### Claims

1. A method of marking a succession of bodies (26) moving along a predetermined path (16) comprising the steps of directing a high energy density beam (46) at a body to be marked (26), concentrating the beam (46) so as to produce an illuminated spot at a location on or within the moving body (26), moving said spot, and controlling the movement of the spot so that said movement is in accordance with the resultant of two components of movement, the first being equal to the velocity of the moving body (26) and the second being relative to the moving body (26) so as to create a mark of a predetermined shape, characterised in that the method further comprises the steps of detecting the presence of the body to be marked (26) at a predetermined location (12) along said path (16) prior to the step of directing the high energy density beam (46) at said body (26) and controlling the movement of the spot in response to the detection of the body (26) at said predetermined location (12) so that the controlled movement is initiated in such a way that the spot impinges upon the body (26) at a desired location.
2. A method in accordance with claim 1, wherein there is included the additional step of determining the velocity of the moving body (26).
3. A method in accordance with claim 2, wherein the

velocity of the moving body (26) is determined by means of direct measurement as opposed to measuring the velocity of any means used to transport the moving body (26).

4. A method in accordance with any preceding claim, wherein the high energy density beam (46) is directed at the moving body (26) by causing the path (16) of the moving body (26) to intersect the path of the actuated high energy density beam (46) and actuating the high energy density beam (46) at a predetermined time after the moving body (26) passes a position (12) a known distance from the point of intersection, that time being dependent upon the velocity of the moving body (26).
5. A method in accordance with any preceding claim, wherein the high energy density beam (46) is brought to a focus at a location within the moving body (26) so as to cause localised ionisation of the material of which the body (26) is formed and the creation of a mark in the form of an area of increased opacity to electromagnetic radiation.
6. A method in accordance with claim 5, wherein the moving body (26) is transparent to electromagnetic radiation at wavelengths within the visible region.
7. A method in accordance with claim 5, wherein the moving body (26) is opaque to electromagnetic radiation at wavelengths within the visible region.
8. A method in accordance with any preceding claim, wherein the mark comprises one or more numerals, letters, or symbols, or a combination thereof.
9. A method in accordance with any preceding claim, wherein the mark is three dimensional.
10. An apparatus for marking a succession of bodies (26) moving along a predetermined path (16) comprising means (44) for creating a high energy density beam (46) and directing the beam (46) at a body to be marked (26), means (76) for concentrating the beam (46) so as to produce an illuminated spot at a location on or within the moving body (26), means (64) for moving said spot, and means (90) for controlling said moving means (64) to provide controlled movement of the spot in accordance with the resultant of two components of movement, the first being equal to the velocity of the moving body (26) and the second being relative to the moving body (26) so as to create a mark of a predetermined shape, characterised in that the apparatus further comprises means (32, 34) for detecting the presence of the body to be marked (26) at a predetermined location (12) along said path (16), said means for controlling (90) being responsive to said means for detecting (32, 34) to initiate said control-

- led movement so that the spot impinges upon the body (26) at a desired location.
11. An apparatus in accordance with claim 10, wherein said means for moving the spot (64) includes means (68, 70) for moving the spot in accordance with said second of the two components of movement, said means (68, 70) comprising at least one moveable mirror disposed in the path of the beam (46).
  12. An apparatus in accordance with claim 11, wherein the movement of said at least one moveable mirror (68, 70) is controlled in accordance with a computer program.
  13. An apparatus in accordance with claim 11 or claim 12, wherein said at least one moveable mirror (68, 70) is a galvanometer mirror.
  14. An apparatus in accordance with any of claims 11 to 13, wherein said means (68, 70) for moving the spot in accordance with said second of the two components of movement is also capable of moving the spot in accordance with said first of the two components.
  15. An apparatus in accordance with any of claims 11 to 13, wherein said means for moving the spot (64) includes additional means (92, 102) for moving the spot in accordance with said first of the two components of movement.
  16. An apparatus in accordance with claim 15, wherein said means for moving the spot in accordance with said first of the two components of movement includes at least one rotatably mounted mirror (102) whose speed of rotation is varied in accordance with the velocity of the moving body (26).
  17. An apparatus in accordance with claim 16, wherein said at least one rotatably mounted mirror (102) is multi-faceted.
  18. An apparatus in accordance with claim 15, wherein said means for moving the spot in accordance with said first of the two components of movement includes at least one mirror (68, 70) moveable at the same velocity as the moving body (26).
  19. An apparatus in accordance with claim 15, wherein said means for moving the spot in accordance with said first of the two components of movement includes at least one acousto-optic or electro-optic crystal.
  20. An apparatus in accordance with any of claims 10 to 19, wherein there is further provided means (32, 34) for determining the velocity of the moving body

(26).

21. An apparatus in accordance with claim 20, wherein said means (32, 34) for determining the velocity of the moving body (26) is such as to determine the velocity of the moving body (26) directly as opposed to simply determining the velocity of any means used to transport the moving body (26).
22. An apparatus in accordance with claim 21, wherein said means for determining the velocity of the moving body (26) comprises two opto-detectors (32, 34) spaced a known distance apart and a clock for measuring the time for the moving body (26) to travel between the two opto-detectors (32, 34).
23. An apparatus in accordance with any of claims 10 to 22, wherein the high energy density beam (46) is directed at the moving body (26) by causing the path (16) of the moving body (26) to intersect the path of the high energy density beam (46) when actuated and providing means to actuate the high energy density beam (46) at a predetermined time after the moving body (26) passes a position a known distance from the point of intersection, that time being dependant on the velocity of the moving body (26).
24. An apparatus in accordance with any of claims 10 to 23, wherein the means for concentrating the beam (76) includes a lens element (92) having a focal length that varies across its width.
25. An apparatus in accordance with any of claims 10 to 24, wherein the means for concentrating the beam (76) includes a zoom lens (94).
26. An apparatus in accordance with any of claims 10 to 24, wherein the means for concentrating the beam (76) includes a diverging lens.
27. An apparatus in accordance with any of claims 10 to 25, wherein the mark comprises a surface mark.
28. An apparatus in accordance with claim 27, wherein the means (44) for creating the high energy density beam (46) comprises a CO<sub>2</sub> laser.
29. An apparatus in accordance with any of claims 10 to 25, wherein the mark comprises a sub-surface mark.
30. An apparatus in accordance with claim 29, wherein the means (44) for creating the high energy density beam (46) comprises a laser which is focused so as to have a peak energy density at the focus of at least 10 J/cm<sup>2</sup>.
31. An apparatus in accordance with claim 29 or claim

30, wherein the means (44) for creating the high energy density beam (46) comprises a laser which is focused so as to have a power density at the focus of at least  $10^7$  W/cm<sup>2</sup> and is pulsed with a pulse duration of at least  $10^{-6}$  seconds.

32. An apparatus in accordance with any of claims 29 to 31, wherein the means (44) for creating the high energy density beam (46) comprises a Nd-YAG laser.

33. An apparatus in accordance with any of claims 10 to 32, wherein there is further provided a secondary source (56) of visible laser radiation (58) to facilitate alignment of the high energy density beam (46).

34. An apparatus in accordance with any of claims 10 to 33 wherein a conveyor belt (16) is provided to transport said moving body (26).

35. An apparatus in accordance with claim 34, wherein means (24) are provided to control the lateral position of the moving body (26) relative to the conveyor belt (16).

#### Patentansprüche

1. Verfahren zum Markierung einer Folge von Körpern (26), die sich längs eines vorgegebenen Weges (16) bewegen, mit den Schritten:  
Richten eines Strahls (46) mit hoher Energiedichte auf einen zu markierenden Körper (26), Konzentrieren des Strahls (46) zum Erzeugen eines Leuchtflecks an einer Stelle auf oder in einem bewegten Körper (26), Bewegen des Flecks, und Steuern der Bewegung des Flecks derart, daß die Bewegung der Resultierenden von zwei Bewegungskomponenten entspricht, von denen die erste gleich der Geschwindigkeit des bewegten Körpers (26) und die zweite eine Relativbewegung zu dem bewegten Körper (26) ist, um eine Markierung von vorgegebener Form zu erzeugen, dadurch gekennzeichnet, daß das Verfahren ferner die Schritte aufweist:  
Detektieren des Vorhandenseins des zu markierenden Körpers (26) an einer vorgegebenen Stelle (12) längs des Weges (16) vor dem Schritt des Richtens des Strahls (46) hoher Energiedichte auf den Körper (26), und Steuern der Bewegung des Flecks in Abhängigkeit von der Detektierung des Körpers (26) an der vorgegebenen Stelle (12) derart, daß die Bewegung derart gestartet wird, daß der Fleck auf den Körper (26) an einer gewünschten Stelle auftrifft.
2. Verfahren nach Anspruch 1, das den zusätzlichen Schritt des Bestimmens der Geschwindigkeit des bewegten Körpers (26) umfaßt.

3. Verfahren nach Anspruch 2, bei dem die Geschwindigkeit des bewegten Körpers (26) mittels einer direkten Messung und nicht durch Messung der Geschwindigkeit einer für den Transport des bewegten Körpers (26) benutzten Einrichtung erfolgt.

4. Verfahren nach einem vorangehenden Anspruch, bei dem der Strahl (46) hoher Energiedichte auf den bewegten Körper (26) dadurch gerichtet wird, daß der Weg (16) des bewegten Körpers (26) den Weg des eingeschalteten Strahls (46) hoher Energiedichte kreuzt und daß der Strahl (46) hoher Energiedichte um eine vorgegebene Zeitspanne später eingeschaltet wird, als der bewegte Körper (26) eine Position (12) durchläuft, die einen bekannten Abstand von dem Kreuzungspunkt hat, wobei die Zeitspanne von der Geschwindigkeit des bewegten Körpers (26) abhängt.

5. Verfahren nach einem vorangehenden Anspruch, bei dem der Strahl (46) hoher Energiedichte auf einen Brennpunkt gebracht wird an einer Stelle innerhalb des bewegten Körpers (26), so daß er eine örtliche Ionisierung des Materials, aus dem der Körper (26) besteht, und die Erzeugung einer Marke bewirkt, die die Form einer Fläche mit erhöhter Undurchlässigkeit gegenüber elektromagnetischer Strahlung hat.

6. Verfahren nach Anspruch 5, bei dem der bewegte Körper (26) für elektromagnetische Strahlung bei Wellenlängen innerhalb des sichtbaren Bereichs transparent ist.

7. Verfahren nach Anspruch 5, bei dem der bewegte Körper (26) für elektromagnetische Strahlung bei Wellenlängen im sichtbaren Bereich undurchlässig ist.

8. Verfahren nach einem vorangehenden Anspruch, bei dem die Markierung ein oder mehrere Zahlen, Buchstaben, Symbole, oder eine Kombination davon aufweist.

9. Verfahren nach einem vorangehenden Anspruch, bei dem die Markierung dreidimensional ist.

10. Vorrichtung zum Markieren einer Folge von Körpern (26), die sich längs eines vorgegebenen Weges (16) bewegen, mit Mitteln (44) zum Erzeugen eines Strahls (46) hoher Energiedichte und zum Richten des Strahls (46) auf einen zu markierenden Körper (26), Mitteln (76) zum Konzentrieren des Strahls (46) zur Erzeugung eines Leuchtflecks an einer Stelle auf oder in dem bewegten Körper (26), Mitteln (64) zum Bewegen des Flecks, und Mitteln (90) zum Steuern der Bewegungsmittel (64) zur Erzeugung einer gesteuerten Bewegung des

- Flecks gemäß der Resultierenden zweier Bewegungskomponenten, von denen die erste gleich der Geschwindigkeit des bewegten Körpers (26) ist und die zweite eine Relativbewegung zu dem bewegten Körper (26) ist, zur Erzeugung einer Markierung von vorgegebener Form, dadurch gekennzeichnet, daß die Vorrichtung ferner Mittel (32, 34) zum Detektieren des Vorhandenseins des zu markierenden Körpers (26) an einer vorgegebenen Stelle (12) längs des Weges (16) und Mittel (90) zum Steuern aufweist, die auf die Detektiermittel (32, 34) ansprechen zum Auslösen der gesteuerten Bewegung derart, daß der Fleck auf den Körper (26) an einer gewünschten Stelle auftrifft.
11. Vorrichtung nach Anspruch 10, bei dem die Mittel zum Bewegen des Flecks Mittel (68, 70) zum Bewegen des Flecks entsprechend der zweiten der beiden Bewegungskomponenten aufweist und diese Mittel (68, 70) mindestens einen beweglichen Spiegel aufweisen, der in dem Weg des Strahls (46) angeordnet ist.
12. Vorrichtung nach Anspruch 1, bei dem die Bewegung des mindestens einen beweglichen Spiegels (68, 70) entsprechend einem Computerprogramm gesteuert ist.
13. Vorrichtung nach Anspruch 11 oder 12, bei dem der mindestens eine bewegliche Spiegel (68, 70) ein Galvanometerspiegel ist.
14. Verfahren nach einem der Ansprüche 11 bis 13, bei dem die Mittel (68, 70) zum Bewegen des Flecks gemäß der zweiten der beiden Bewegungskomponenten auch zur Bewegung des Flecks entsprechend der ersten der beiden Komponenten in der Lage sind.
15. Vorrichtung nach einem der Ansprüche 11 bis 13, bei dem die Mittel zum Bewegen des Flecks (64) zusätzliche Mittel (92, 102) zum Bewegen des Flecks entsprechend der ersten der beiden Bewegungskomponenten aufweisen.
16. Vorrichtung nach Anspruch 15, bei dem die Mittel zum Bewegen des Flecks gemäß der ersten der beiden Bewegungskomponenten mindestens einen drehbar gelagerten Spiegel (102) umfassen, dessen Drehgeschwindigkeit entsprechend der Geschwindigkeit des bewegten Körpers (26) variiert wird.
17. Verfahren nach Anspruch 16, bei dem der mindestens eine drehbar gelagerte Spiegel (102) ein Mehrfacettenspiegel ist.
18. Vorrichtung nach Anspruch 15, bei dem die Mittel zum Bewegen des Flecks gemäß der ersten der beiden Bewegungskomponenten mindestens einen Spiegel (68, 70) aufweisen, der mit der gleichen Geschwindigkeit wie der bewegte Körper (26) bewegbar ist.
19. Vorrichtung nach Anspruch 15, bei dem die Mittel zum Bewegen des Flecks gemäß der ersten der beiden Bewegungskomponenten mindestens einen akusto-optischen oder elektro-optischen Kristall enthalten.
20. Vorrichtung nach einem der Ansprüche 10 bis 19, bei der ferner Mittel (32, 34) zum Bestimmen der Geschwindigkeit des bewegten Körpers (26) vorgesehen sind.
21. Vorrichtung nach Anspruch 20, bei dem die Mittel (32, 34) zum Bestimmen der Geschwindigkeit des bewegten Körpers (26) derart sind, daß sie die Geschwindigkeit des bewegten Körpers (26) direkt erfassen und nicht einfach die Geschwindigkeit einer zum Transport des bewegten Körpers (26) benutzten Vorrichtung erfassen.
22. Vorrichtung nach Anspruch 21, bei dem die Mittel zum Bestimmen der Geschwindigkeit des bewegten Körpers (26) zwei Opto-Detektoren (32, 34) aufweisen, die in einem bekannten Abstand voneinander angeordnet sind, sowie eine Uhr zum Messen der Zeit, die der bewegte Körper (26) zwischen den beiden Opto-Dektoren (32, 34) zurücklegt.
23. Vorrichtung nach einem der Ansprüche 10 bis 22, bei der der Strahl (46) mit hoher Energiedichte auf den bewegten Körper (26) dadurch gerichtet wird, daß der Weg (16) des bewegten Körpers (26) den Weg des Strahls (46) hoher Energiedichte kreuzt, wenn dieser eingeschaltet ist, und daß Mittel vorgesehen sind zum Einschalten des Strahls (46) hoher Energiedichte, um eine vorgegebene Zeitspanne nach dem Zeitpunkt, zu dem der bewegte Körper (26) eine Position durchläuft, die einen bekannten Abstand von dem Kreuzungspunkt hat, wobei die Zeitspanne von der Geschwindigkeit des bewegten Körpers (26) abhängt.
24. Vorrichtung nach einem der Ansprüche 10 bis 23, bei der die Mittel zum Konzentrieren des Strahls (46) ein Linsenelement (92) aufweisen, das eine über seine Breite veränderliche Brennweite hat.
25. Vorrichtung nach einem der Ansprüche 10 bis 24, bei der die Mittel zum Konzentrieren des Strahls (46) eine Zoomlinse (94) aufweisen.
26. Vorrichtung nach einem der Ansprüche 10 bis 24, bei der die Mittel zum Konzentrieren des Strahls (46) eine Zerstreuungslinse aufweisen.

27. Vorrichtung nach einem der Ansprüche 10 bis 26, bei der die Markierung eine Oberflächenmarkierung ist.
28. Vorrichtung nach Anspruch 27, bei der das Mittel (44) zum Erzeugen des Strahls (46) hoher Energiedichte ein CO<sub>2</sub>-Laser ist. 5
29. Vorrichtung nach einem der Ansprüche 10 bis 25, bei der die Markierung eine unter der Oberfläche liegende Markierung ist. 10
30. Vorrichtung nach Anspruch 29, bei der das Mittel (44) zum Erzeugen des Strahls (46) hoher Energiedichte ein Laser ist, der so fokussiert ist, daß er eine maximale Energiedichte am Brennpunkt von mindestens 10 J cm<sup>2</sup> hat. 15
31. Vorrichtung nach Anspruch 29 oder 30, bei der das Mittel (44) zum Erzeugen des Strahls (46) hoher Energiedichte ein Laser ist, der so fokussiert ist, daß er eine Leistungsdichte im Brennpunkt von mindestens 10<sup>7</sup> W/cm<sup>2</sup> hat und mit einer Pulsdauer von mindestens 10<sup>-6</sup> sec gepulst ist. 20
32. Vorrichtung nach einem der Ansprüche 29 bis 31, bei der das Mittel (44) zum Erzeugen des Strahls (46) hoher Energiedichte ein ND-YAG-Laser ist. 30
33. Vorrichtung nach einem der Ansprüche 10 bis 32, bei der ferner eine zweite Quelle (46) für sichtbare Laserstrahlung (68) vorgesehen ist zum Erleichtern der Ausrichtung des Strahls (46) hoher Energiedichte. 35
34. Vorrichtung nach einem der Ansprüche 10 bis 33, bei der ein Förderband (16) zum Transportieren des bewegten Körpers (26) vorgesehen ist. 40
35. Vorrichtung nach Anspruch 34, bei der Mittel (24) vorgesehen sind zum Steuern der seitlichen Position des bewegten Körpers (26) relativ zum Förderband (16). 45

#### Revendications

1. Procédé de marquage d'une succession de corps (26) se déplaçant le long d'une trajectoire prédéterminée (16), comprenant les étapes consistant à diriger un faisceau à haute densité d'énergie (46) sur un corps devant être marqué (26), concentrer le faisceau (46) de manière à produire un spot éclairé en un emplacement situé sur ou dans le corps mobile (26), déplacer ledit spot et commander le déplacement du spot de manière que ledit déplacement corresponde à la résultante de deux composantes de déplacement, la première étant égale à la vitesse du corps mobile (26) et la seconde étant

relative par rapport au corps mobile (26) de manière à créer une marque ayant une forme prédéterminée, caractérisé en ce que le procédé comprend, en outre, les étapes consistant à détecter la présence du corps devant être marqué (26) en un emplacement prédéterminé (12) le long dudit trajet (16) avant l'étape consistant à diriger le faisceau à haute densité d'énergie (46) sur ledit corps (26), et commander le déplacement du spot en réponse à la détection du corps (26) audit emplacement prédéterminé (12) de sorte que le déplacement commandé est déclenché de manière que le spot rencontre le corps (26) en un emplacement désiré.

2. Procédé selon la revendication 1 dans lequel il est prévu l'étape additionnelle consistant à déterminer la vitesse du corps mobile (26).
3. Procédé selon la revendication 2, dans lequel la vitesse du corps mobile (26) est déterminée au moyen d'une mesure directe, contrairement à la mesure de la vitesse de tout moyen utilisé pour transporter le corps mobile (26).
4. Procédé selon l'une quelconque des revendications précédentes, dans lequel on dirige le faisceau à haute densité d'énergie (46) sur le corps mobile (26) en amenant la trajectoire (16) du corps mobile (26) à croiser la trajectoire du faisceau à haute densité d'énergie activé (46) et on active le faisceau à haute densité d'énergie (46) au bout d'un intervalle de temps prédéterminé après que le corps mobile (26) a franchi une position (12) située à une distance connue du point d'intersection, cet intervalle de temps dépendant de la vitesse du corps mobile (26).
5. Procédé selon l'une quelconque des revendications précédentes, dans lequel le faisceau à haute densité d'énergie (46) est focalisé en un emplacement situé à l'intérieur du corps mobile (26) de manière à provoquer une ionisation localisée du matériau dont le corps (26) est formé, et la création d'une marque sous la forme d'une zone d'opacité accrue vis-à-vis du rayonnement électromagnétique.
6. Procédé selon la revendication 5, dans lequel le corps mobile (26) est transparent pour le rayonnement électromagnétique pour des longueurs d'onde situées dans la gamme visible.
7. Procédé selon la revendication 5, dans lequel le corps mobile (26) est opaque vis-à-vis du rayonnement électromagnétique pour des longueurs d'onde situées dans la gamme visible.
8. Procédé selon l'une quelconque des revendications précédentes, dans lequel la marque comprend un ou plusieurs chiffres, lettres ou symboles ou une



combinaison de tels éléments.

9. Procédé selon l'une quelconque des revendications précédentes, dans lequel la marque est tridimensionnelle.
10. Dispositif pour marquer une succession de corps (26) se déplaçant sur une trajectoire prédéterminée (16), comprenant des moyens (44) pour créer un faisceau à haute densité d'énergie (46) et diriger le faisceau (46) sur un corps devant être marqué (26), des moyens (76) pour concentrer le faisceau (46) de manière à produire un spot éclairé en un emplacement situé sur ou dans le corps mobile (26), des moyens (64) pour déplacer ledit spot, et des moyens (90) pour commander lesdits moyens mobiles (64) de manière à obtenir un déplacement commandé du spot en fonction de la résultante de deux composantes de déplacement, la première étant égale à la vitesse du corps mobile (26) et la seconde étant relative par rapport au corps mobile (26) de manière à créer une marque ayant une forme prédéterminée, caractérisé en ce que l'appareil comporte, en outre, des moyens (32,34) pour détecter la présence du corps devant être marqué (26) en un emplacement prédéterminé (12) le long de ladite trajectoire (16), lesdits moyens de commande (90) étant aptes à répondre auxdits moyens de détection (32,34) pour déclencher ledit déplacement commandé de sorte que le spot rencontre le corps (26) en un emplacement désiré.
11. Dispositif selon la revendication 10, dans lequel lesdits moyens de déplacement du spot (64) comprennent des moyens (68,70) pour déplacer le spot en fonction de ladite seconde des deux composantes de déplacement, lesdits moyens (68,70) comprenant au moins un miroir mobile disposé sur le trajet du faisceau (46).
12. Dispositif selon la revendication 11, dans lequel le déplacement au moins dudit miroir mobile (68,70) est commandé en fonction d'un programme d'ordinateur.
13. Dispositif selon la revendication 11 ou 12, dans lequel au moins ledit miroir mobile (68,70) est un miroir galvanométrique.
14. Dispositif selon l'une quelconque des revendications 11 à 13, dans lequel lesdits moyens (68,70) pour déplacer le spot conformément à ladite seconde des deux composantes de déplacement sont également capables de déplacer le spot conformément à ladite première des deux composantes.
15. Dispositif selon l'une quelconque des revendications 11 à 13, dans lequel lesdits moyens pour

déplacer le spot (64) comprennent des moyens additionnels (92, 102) pour déplacer le spot conformément à ladite première des deux composantes de déplacement.

16. Dispositif selon la revendication 15, dans lequel lesdits moyens pour déplacer le spot en fonction de ladite première des deux composantes de déplacement comprennent au moins un miroir monté rotatif (102) dont la vitesse de rotation est modifiée en fonction de la vitesse du corps mobile (26).
17. Dispositif selon la revendication 16, dans lequel au moins ledit miroir monté rotatif (102) est à facettes multiples.
18. Dispositif selon la revendication 15, dans lequel lesdits moyens pour déplacer le spot en fonction de ladite première des deux composantes de déplacement comprennent au moins un miroir (68,70) déplaçable à la même vitesse que le corps mobile (26).
19. Dispositif selon la revendication 15, dans lequel lesdits moyens pour déplacer le spot en fonction de ladite première des deux composantes de déplacement comprennent au moins un cristal acousto-optique ou électro-optique.
20. Dispositif selon l'une quelconque des revendications 10 à 19, dans lequel il est, en outre, prévu des moyens (32,34) pour déterminer la vitesse du corps mobile (26).
21. Dispositif selon la revendication 20, dans lequel lesdits moyens (32,34) pour déterminer la vitesse du corps mobile (26) sont aptes à déterminer la vitesse du corps mobile (26) directement à l'opposé de la simple détermination de la vitesse d'un moyen que conque utilisé pour transporter le corps mobile (26).
22. Dispositif selon la revendication 21, dans lequel lesdits moyens de détermination de la vitesse du corps mobile (26) comprennent deux détecteurs optiques (32,34) séparés par une distance connue, et une horloge pour mesurer la durée de déplacement du corps mobile (26) entre les deux détecteurs optiques (32,34).
23. Dispositif selon l'une quelconque des revendications 10 à 22, dans lequel le faisceau à haute densité d'énergie (46) est dirigé sur le corps mobile (26) de manière à amener la trajectoire (16) du corps mobile (26) à croiser la trajectoire du faisceau à haute densité d'énergie (46) lorsqu'il est actionné, et il est prévu des moyens pour actionner le faisceau à haute densité d'énergie (46) au bout d'un intervalle de temps prédéterminé après que le

corps mobile (26) a franchi une position située à une distance connue du point d'intersection, cet intervalle de temps dépendant de la vitesse du corps mobile (26).

24. Dispositif selon l'une quelconque des revendications 10 à 23, dans lequel les moyens pour concentrer le faisceau (76) comprennent un élément de lentille (92) possédant une distance focale qui varie sur l'étendue en largeur de cet élément. 10
25. Dispositif selon l'une quelconque des revendications 10 à 24, dans lequel les moyens de concentration du faisceau (76) comportent une lentille de zoom (94). 15
26. Dispositif selon l'une quelconque des revendications 10 à 24, dans lequel les moyens de concentration du faisceau (76) comprennent une lentille divergente. 20
27. Dispositif selon l'une quelconque des revendications 10 à 26, dans lequel la marque comprend une marque de surface. 25
28. Dispositif selon la revendication 27, dans lequel les moyens (44) pour créer le faisceau à haute densité d'énergie (46) comprennent un laser à CO<sub>2</sub>.
29. Dispositif selon l'une quelconque des revendications 10 à 25, dans lequel la marque comprend une marque située au-dessous de la surface. 30
30. Dispositif selon la revendication 29, dans lequel les moyens (44) servent à créer le faisceau à haute densité d'énergie (46) comprennent un laser qui est focalisé de manière à posséder une densité d'énergie de pointe au foyer d'au moins 10 J/cm<sup>2</sup>. 35
31. Dispositif selon la revendication 29 ou 30, dans lequel les moyens (44) pour créer le faisceau à haute densité d'énergie (46) comprennent un laser qui est focalisé de manière à posséder une densité de puissance au foyer d'au moins 10<sup>7</sup> W/cm<sup>2</sup> et est pulsé avec une durée d'impulsion d'au moins 10<sup>-6</sup> seconde. 40 45
32. Dispositif selon l'une quelconque des revendications 29 à 31, dans lequel les moyens (44) pour créer le faisceau à haute densité d'énergie (46) comprennent un laser Nd-YAG. 50
33. Dispositif selon l'une quelconque des revendications 10 à 32, dans lequel il est, en outre, prévu une source secondaire (56) d'un rayonnement laser visible (58) pour faciliter l'alignement du faisceau à haute densité d'énergie (46). 55
34. Dispositif selon l'une quelconque des revendica-

tions 10 à 32, dans lequel une bande convoyeuse (16) est prévue pour transporter ledit corps mobile (26).

- 5 35. Dispositif selon la revendication 34, dans lequel des moyens (24) sont prévus pour commander la position latérale du corps mobile (26) par rapport à la bande convoyeuse (16).

FIG. 1.

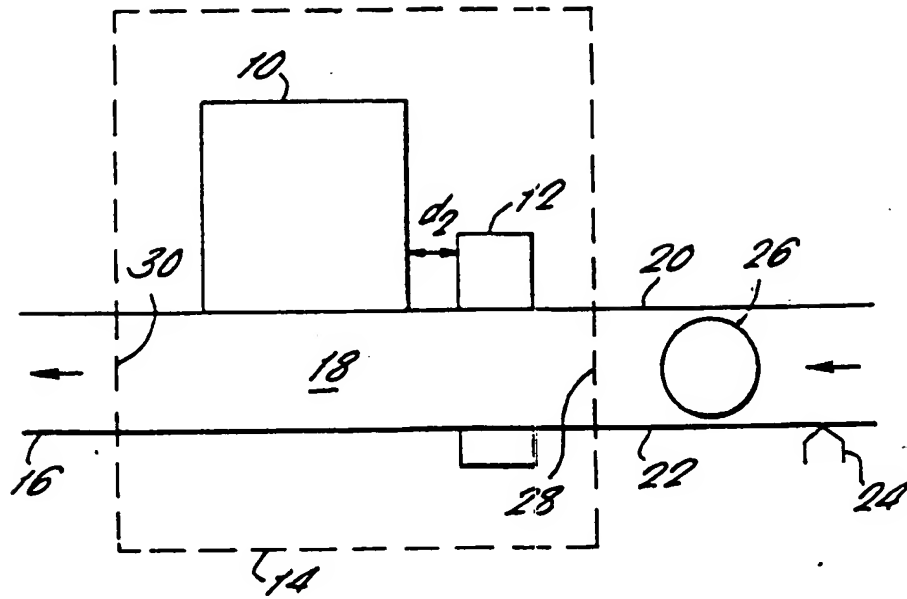
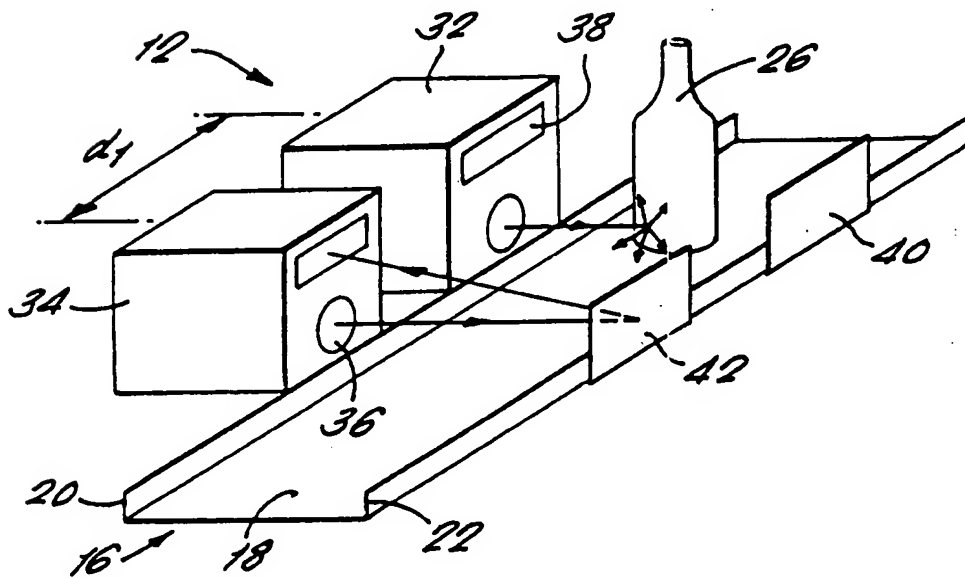
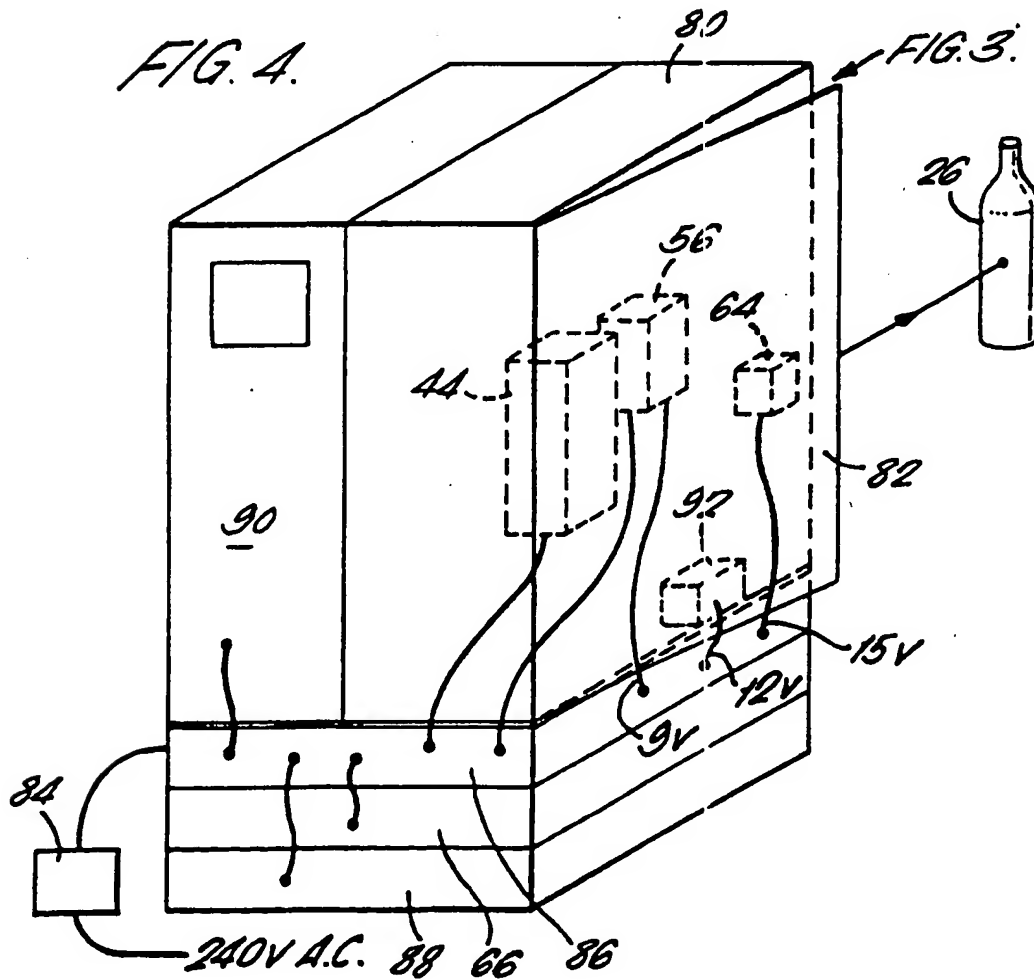
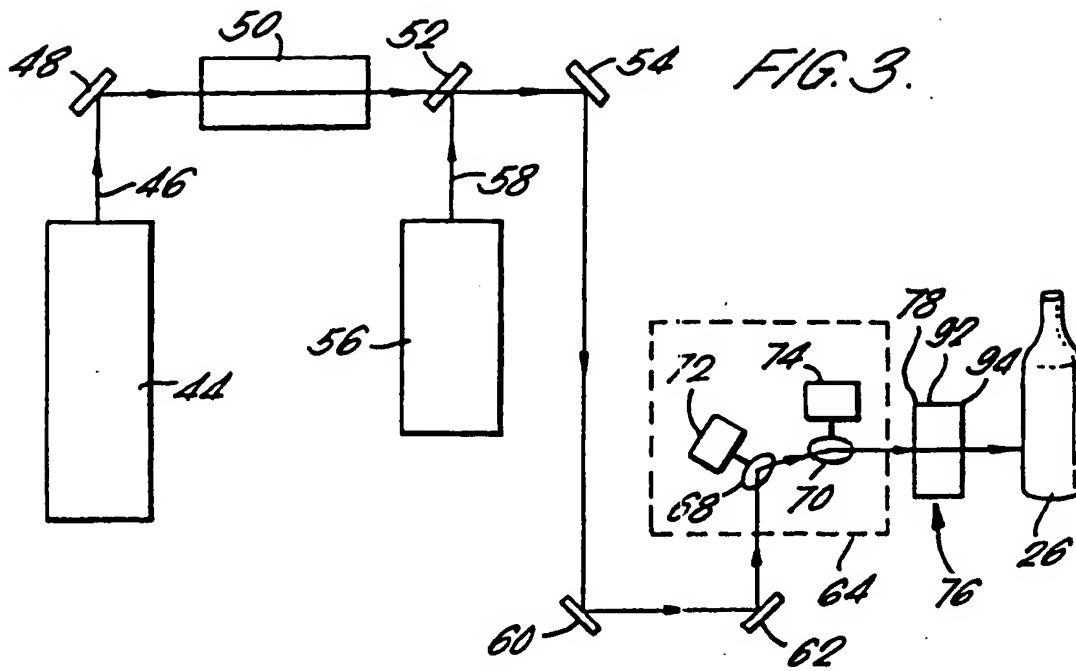
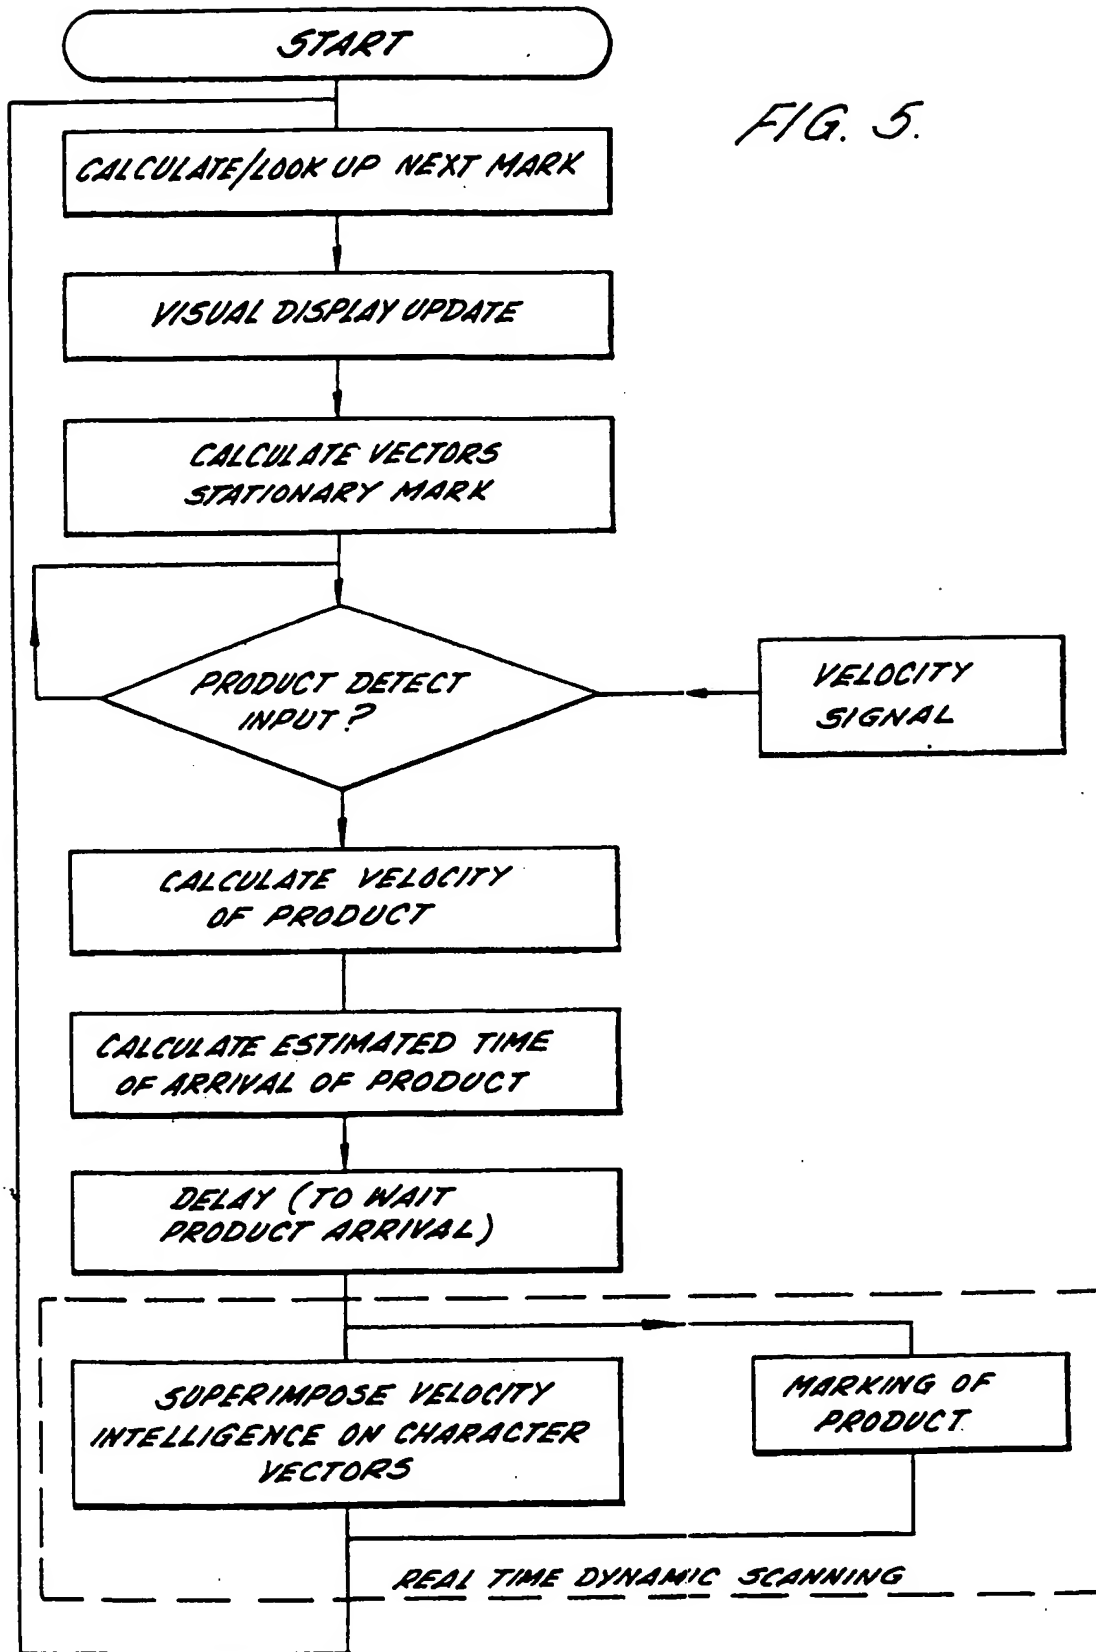


FIG. 2.








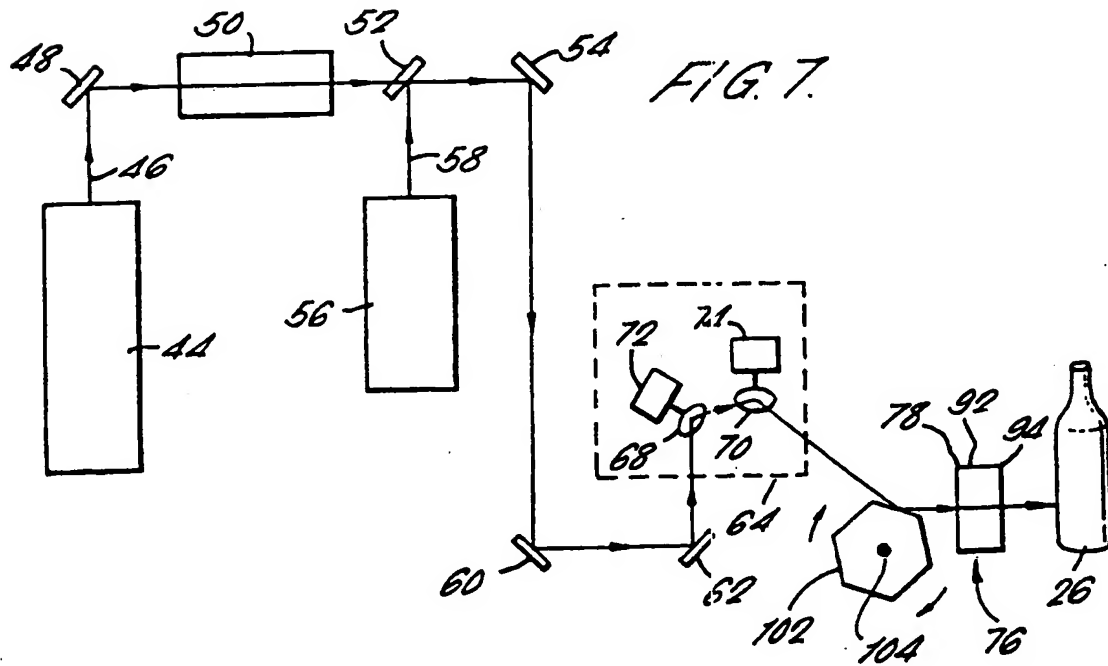




FIG. 8

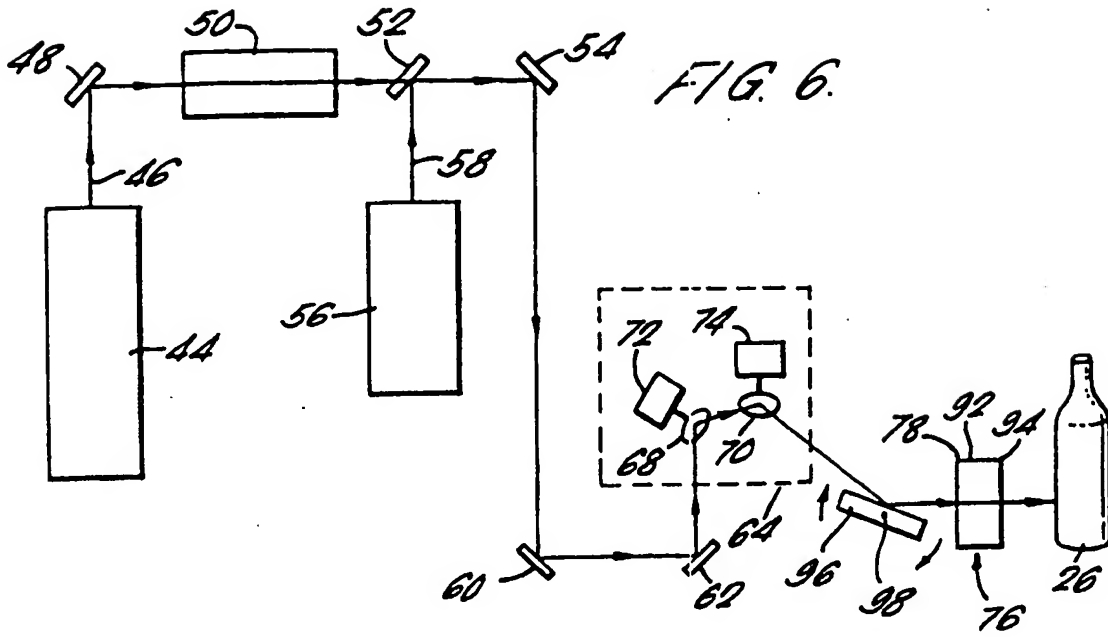